



KIT 0020

85002000200

SA-16B ALBATROSS

The SA-16B Albatross is known primarily for it's unequaled capability as an air/sea rescue plane, though it had also seen service in anti-sub warfare and escort and surveillance missions. The Albatross scanned every inch of it's 2,700 mile range through electronic and human-observer eyes in its search and rescue duties. Nearly 63' long and 26' high, it can lift up to 15 survivors or drop an air rescue kit to provide shelter and medical aid for 40 people.

Your Revell model features an operating landing gear that extends and retracts, three crewmen and life raft with 2 survivors, and authentic decals.



* REPEAT SEVERAL TIMES

* REPEAT PROCEDURE

* OPTIONAL PARTS

* DECAL

* ASSEMBLY CAUTION

* CEMENT TOGETHER

* REMOVE AND THROW AWAY

* DO NOT CEMENT

* A REPETER PLUSIEURS FOIS

* R  P  TEZ LE PROC    

* PI  CES EN OPTION

* DECAL COMANIE

* ATTENTION D'ASSEMBLEE

* A COLLER

* A RETIRER ET JETER

* NE PAS COLLER

READ THIS BEFORE YOU BEGIN

- * Study the assembly drawings.
- * Each plastic part is identified by a number.
- * In the assembly drawings, some parts will be marked by a star (★) to indicate chrome plated plastic.
- * For better paint and decal adhesion, wash the plastic parts in a mild detergent solution. Rinse and let air dry.
- * Check the fit of each piece before cementing in place.
- * Use only cement for polystyrene plastic.
- * Scrape plating and paint from areas to be cemented.
- * Allow paint to dry thoroughly before handling parts.
- * Any unused parts may be discarded.

DECAL APPLICATION INSTRUCTIONS

1. Cut desired decal from sheet.
2. Dip decal in water for a few seconds.
3. Place wet decal on paper towel.
4. Wait until decal is movable on paper backing.
5. Place decal in position on model, face up and slide backing away.
6. Press out air bubbles with a soft damp cloth.
7. Milkyness that may appear is for better decal adhesion and will dry clear. Wipe away any excess adhesive.
8. Do not touch decal until fully dry.
9. Allow the decals 48 hours to dry before applying clear coat.

NOTE: Decals are compatible with setting solutions or solvents.

LIRE CE QUI SUIT AVANT DE COMMENCER

- * Etudier les sch  mas de montage.
- * Chaque pi  ce en plastique est identifi  e par un num  ro.
- * Sur les sch  mas de montage, certaines pi  ces sont marqu  es d'une   toile (★) pour indiquer qu'elles sont en plastique chrom  .
- * Pour une meilleure prise de la peinture et des autocollants, laver les pi  ces en plastique avec une solution d  tergente peu concentr  e. Les rincer et les laisser s  cher    l'air.
- * V  rifier que chaque pi  ce s'ajuste bien avant de la coller en place.
- * N'utiliser que de la colle pour polystyr  ne.
- * Gratter les parties    coller pour enlever le chrome et la peinture.
- * Laisser la peinture bien s  cher avant de manipuler les pi  ces.
- * Toute pi  ce inutilis  e peut   tre jet  e.

DIRECTIVES D'APPLICATION DES AUTOCOLLANTS

1. D  couper l'autocollant d  sir   de la feuille.
2. Tremper l'autocollant dans de l'eau pendant quelques secondes.
3. Placer l'autocollant mouill   sur une serviette en papier.
4. Attendez que l'autocollant puisse   tre d  plac   sur son support en papier.
5. Mettre l'autocollant en position sur le mod  le face sur le dessus et faire glisser le support pour l'enlever.
6. Appuyer avec un chiffon doux humide pour   liminer les bulles d'air.
7. La substance laiteuse qui peut appara  tre est destin  e    am  liorer l'adh  sion de l'autocollant et devient incolore au s  chage. Essuyer pour enlever tout exc  dent d'adh  sif.
8. Ne pas toucher l'autocollant tant qu'il n'est pas bien sec.
9. Laisser l'autocollant s  cher pendant 48 heures avant d'appliquer une couche transparente.

REMARQUE: Les autocollants sont compatibles avec les solutions de fixation ou les solvants.

This paint guide is provided to complete this kit as shown on the box.

Ce guide de peintures est fourni pour reproduire le mod  le r  duit qui appar  it sur la bo  te.

Blue Green	Bleu vert
Semi Gloss Black	Noir satin��
Flesh	Chair
Yellow	Jaune
Brown	Brun
White	Blanc
Aluminum	Aluminum
International Orange	Orange International
Red	Rouge

If you have any questions or comments, call our hotline at: (800) 833-3570 or, please write to:




Revell Inc Consumer Service Department, 1850 Howard Street Unit A, Elk Grove Village, Illinois 60007

Be sure to include the plan number (85002000200), part number, description, your return address and phone number.

Visit our website: www.revell.com


1

FUSELAGE / NOSE WHEEL ASSEMBLY

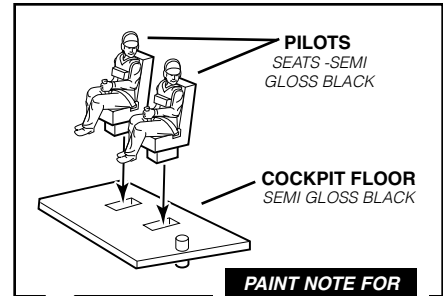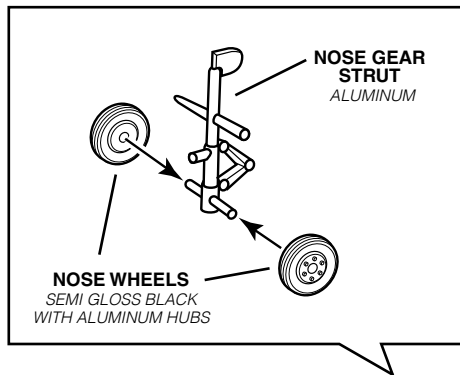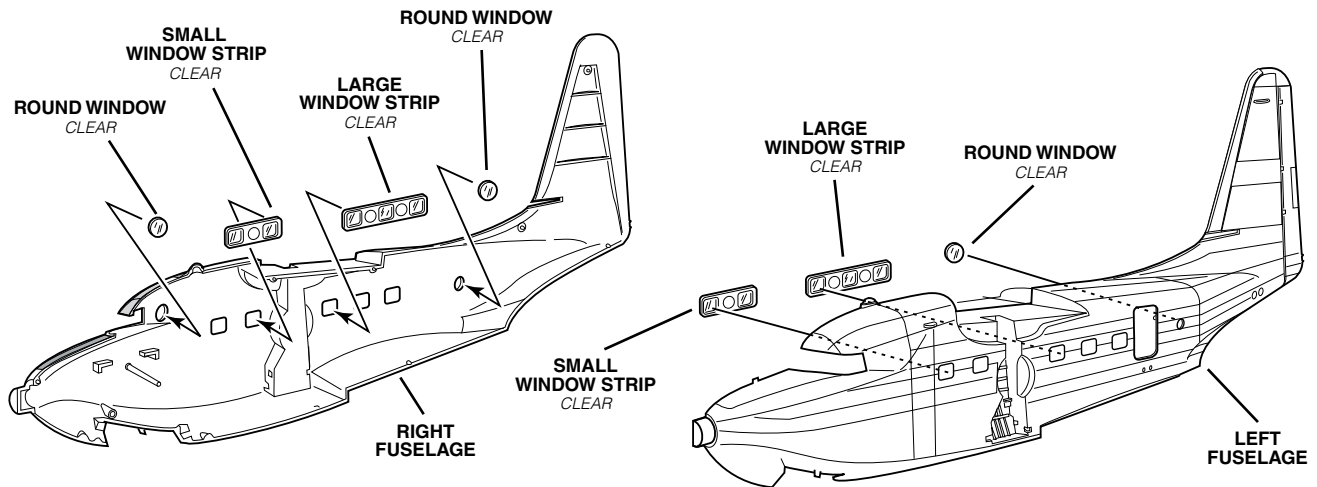



PAINT NOTE FOR PILOTS:

GREEN - FLIGHT SUIT
BLACK - SHOES, FLESH - FACE AND HANDS
YELLOW - LIFE JACKETS
RED - CAPS

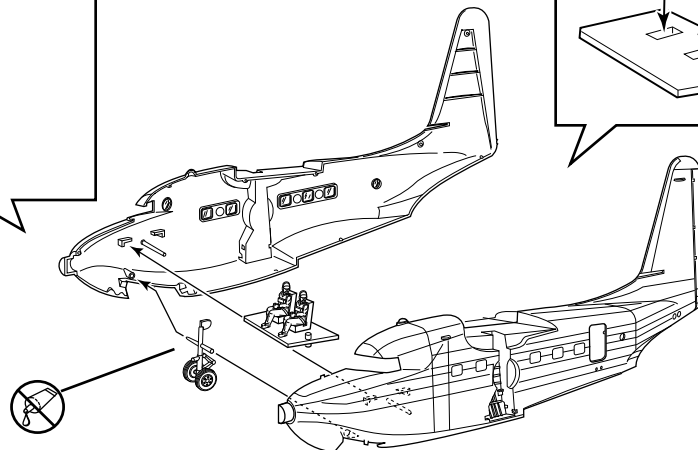

2


WING ASSEMBLY

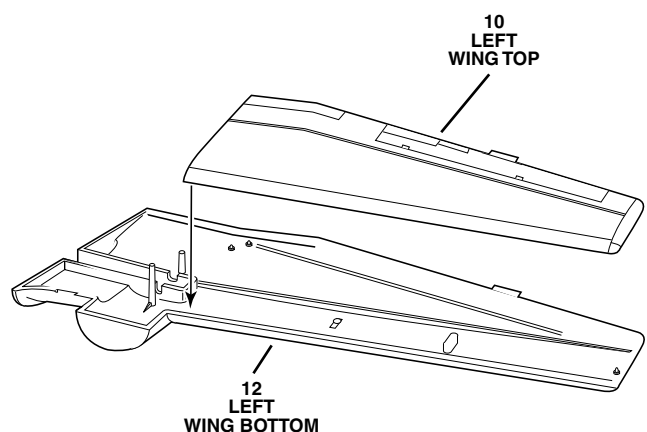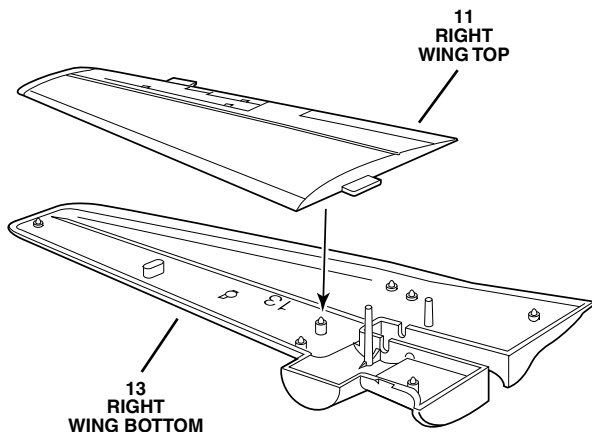








3

MAIN STRUT / WING ASSEMBLY

RIGHT THESE PINS ON RIGHT TOP STRUT ARE THINNER THAN PINS ON LEFT TOP STRUT

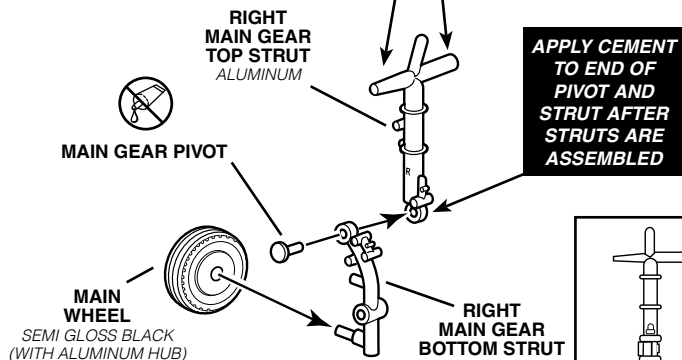


LEFT THESE PINS ON RIGHT TOP STRUT ARE THINNER THAN PINS ON LEFT TOP STRUT

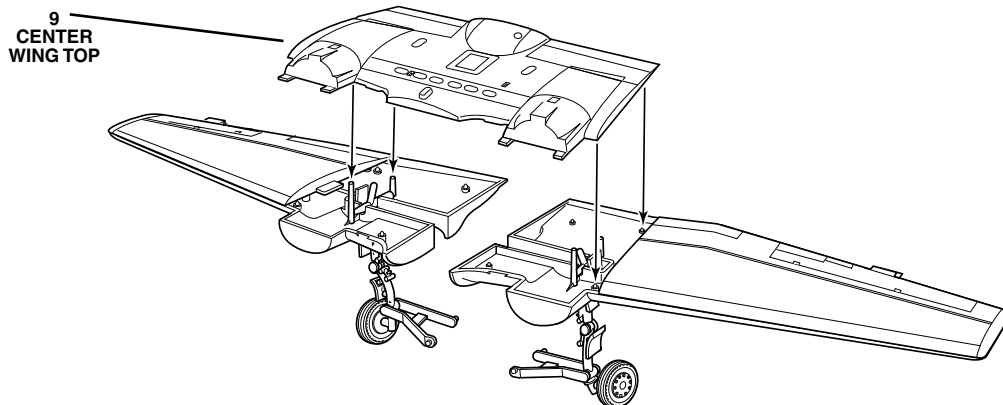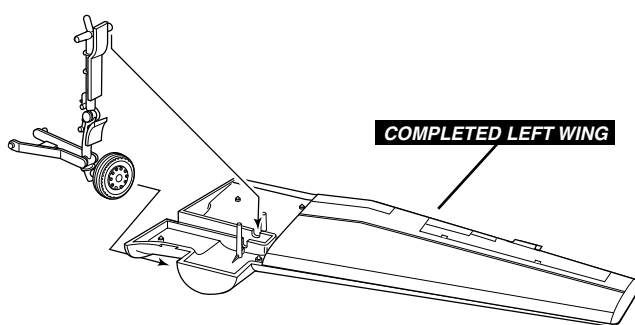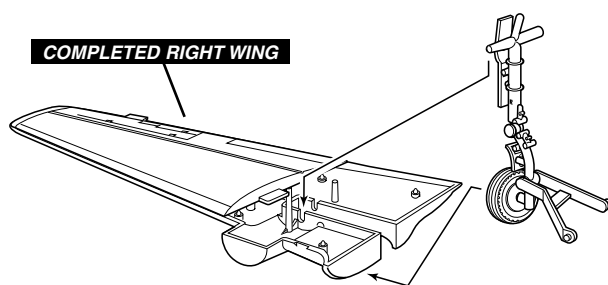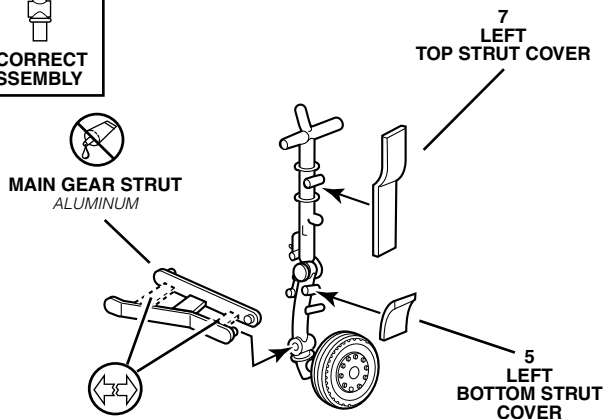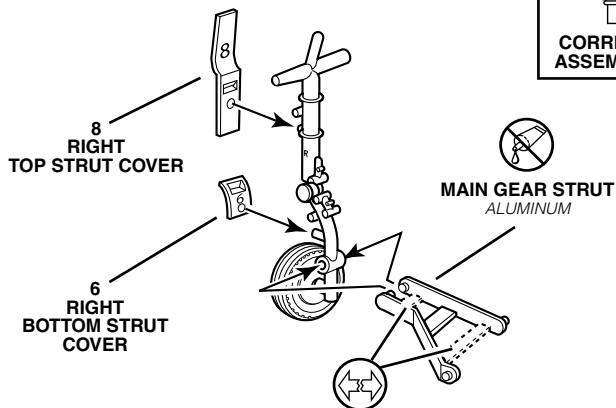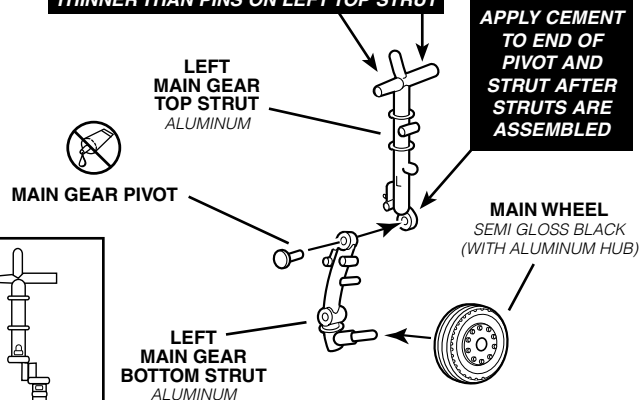


4

DOOR / WING ASSEMBLY

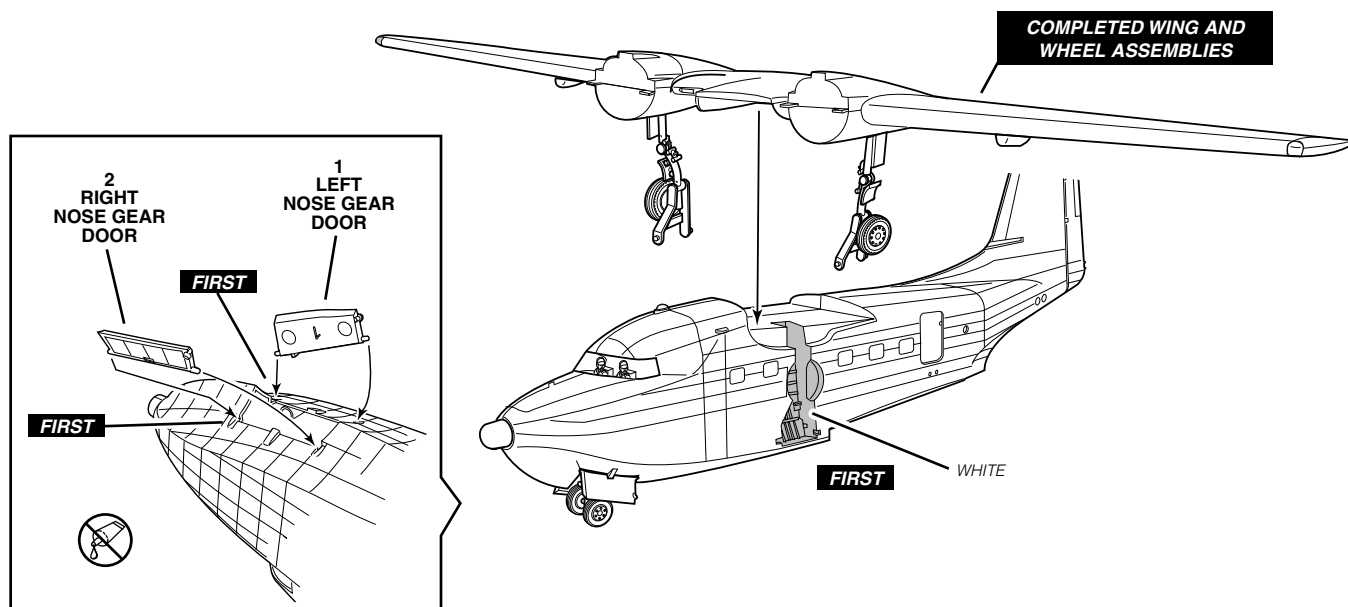


5

MAIN STRUT DOOR ASSEMBLY

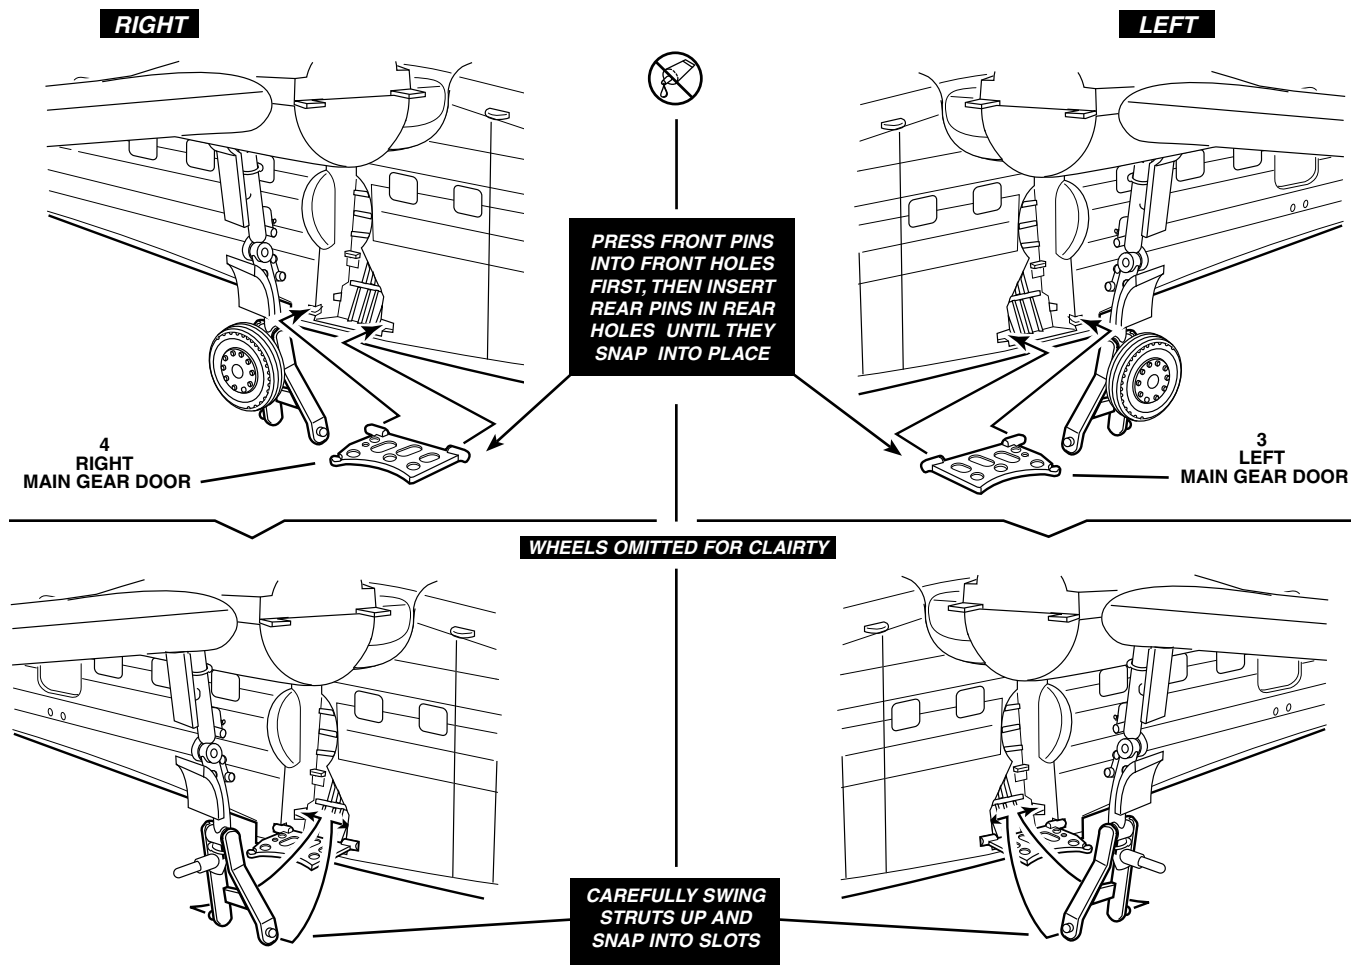




6

STABILIZER / ANTENNA ASSEMBLY

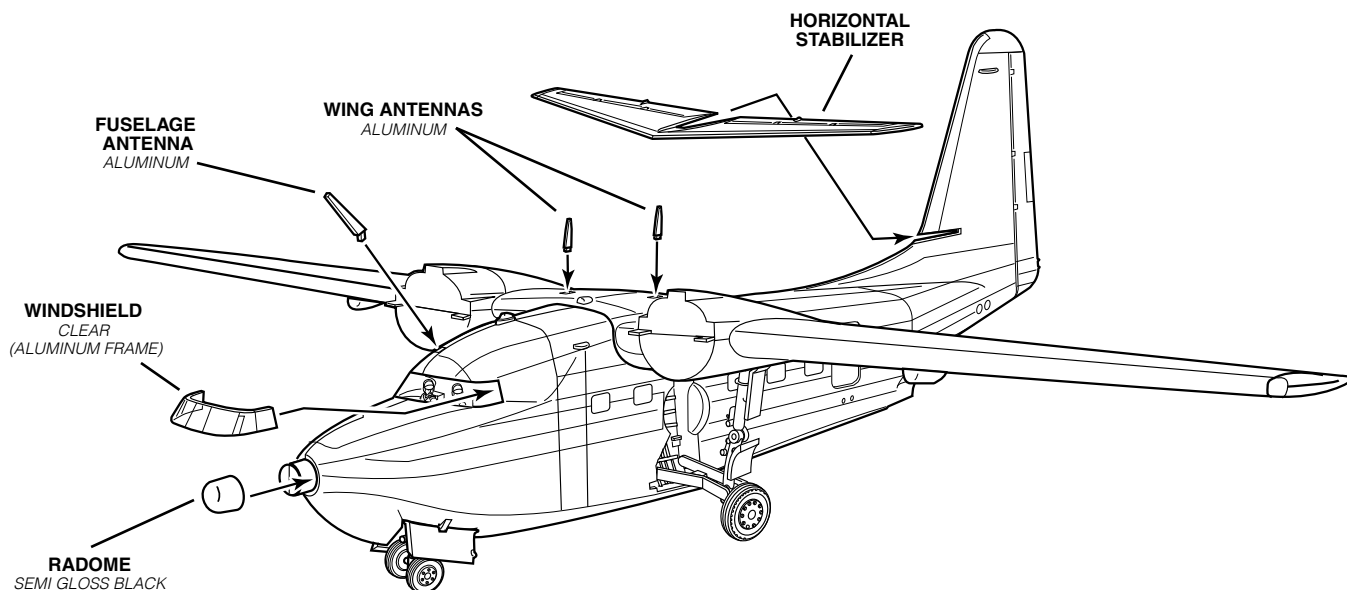



7

TANK / FLOAT ASSEMBLY

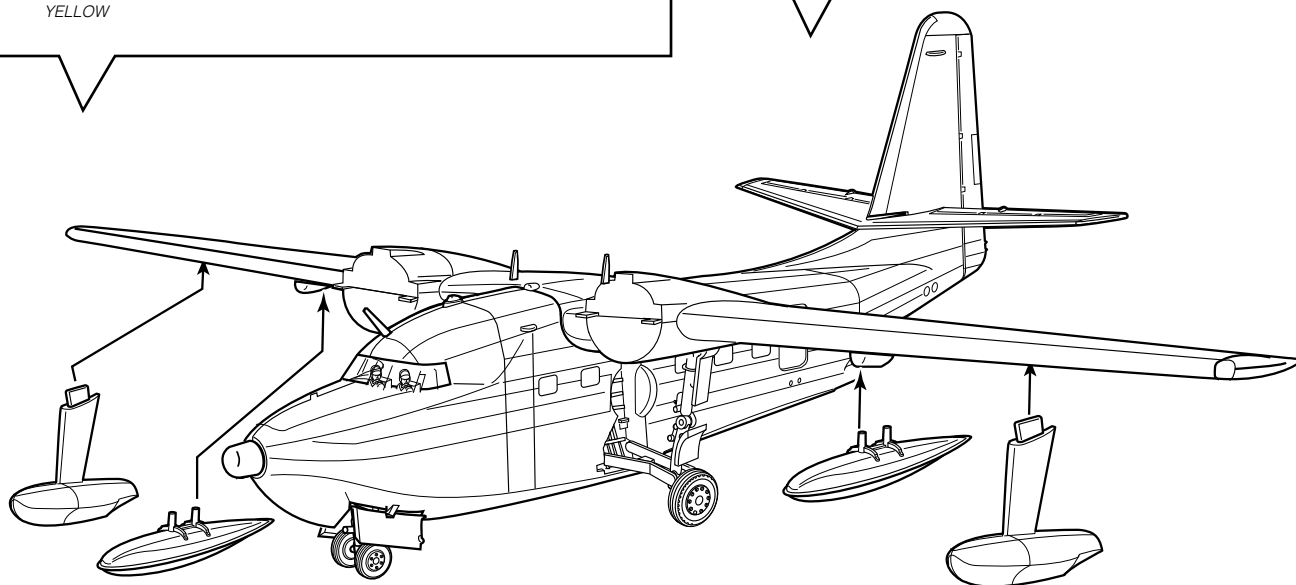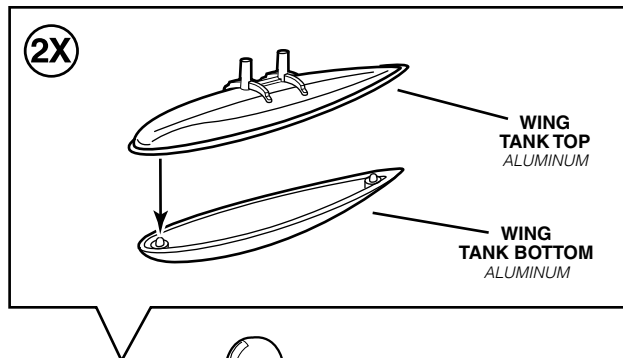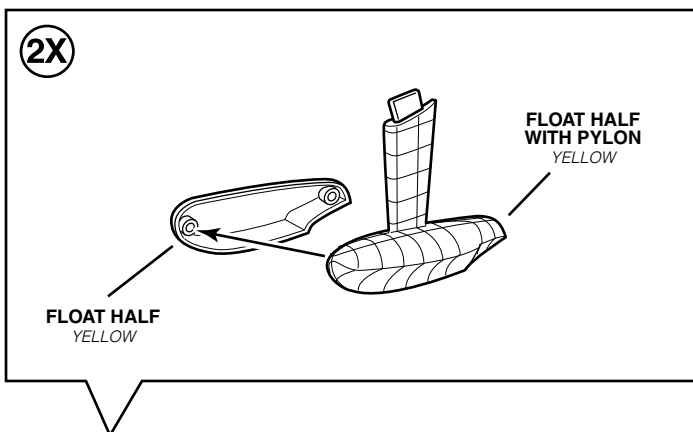



8

PROPELLER ASSEMBLY

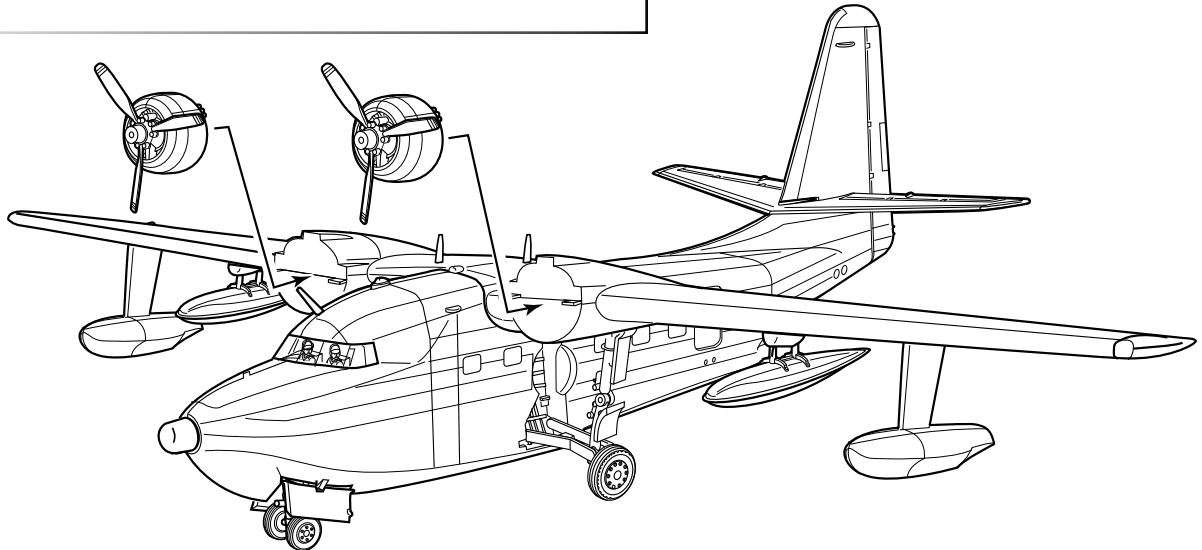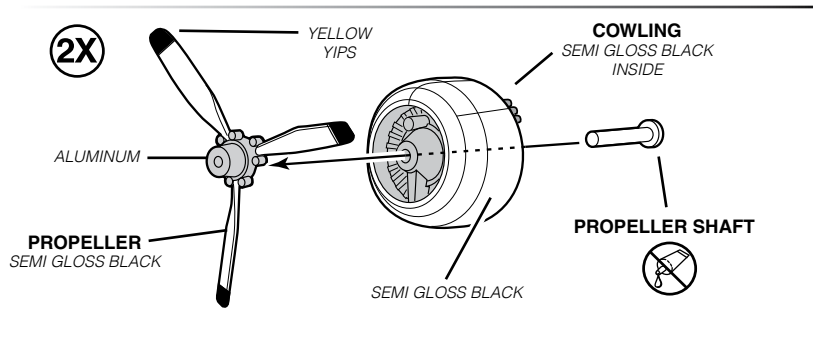

9

FINAL ASSEMBLY

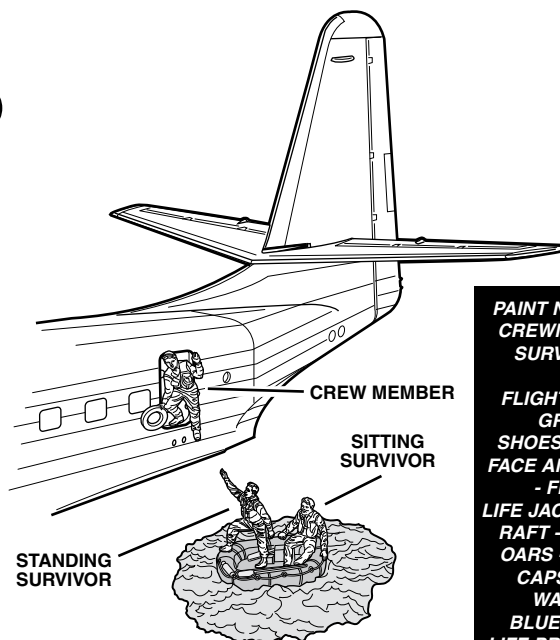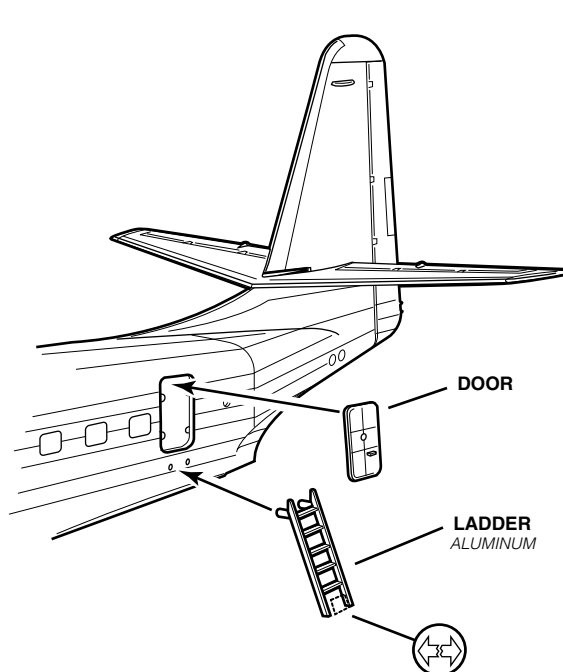


PAINT NOTE FOR CREWMAN AND SURVIVORS:

FLIGHT SUITS - GREEN
SHOES - BLACK
FACE AND HANDS - FLESH
LIFE JACKETS AND RAFT - YELLOW
OARS - BROWN
CAPS - RED
WATER - BLUE GREEN
LIFE PRESERVER - INT. ORANGE


DECAL PLACEMENT



USAF SA-16B, ALBATROSS 354th TACTICAL FIGHTER WING

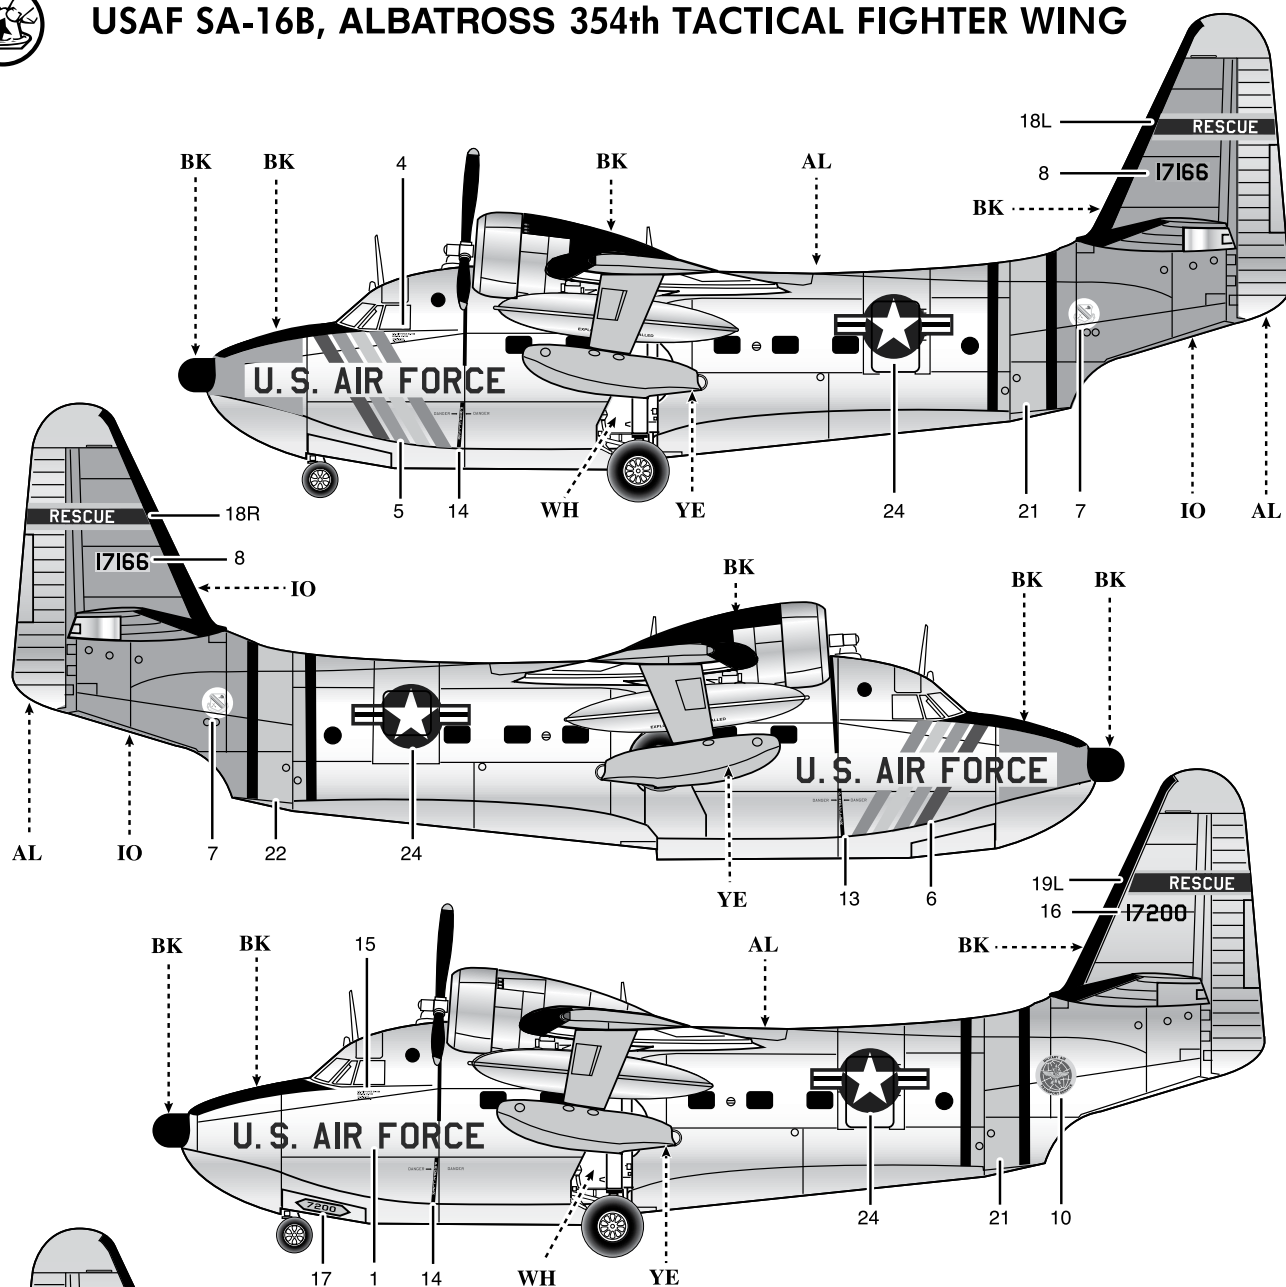



USAF SA-16B, ALBATROSS MILITARY AIR TRANSPORT SERVICE

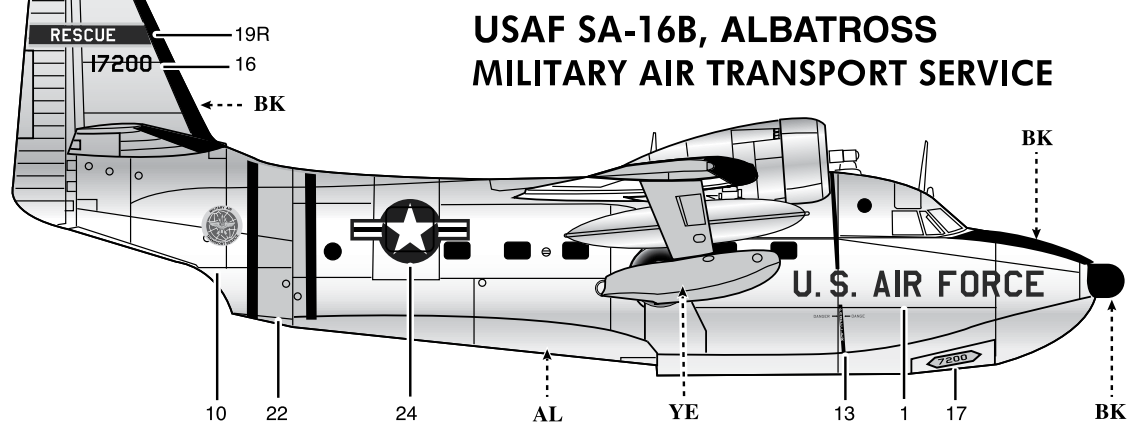




USAF SA-16B

PROPELLERS

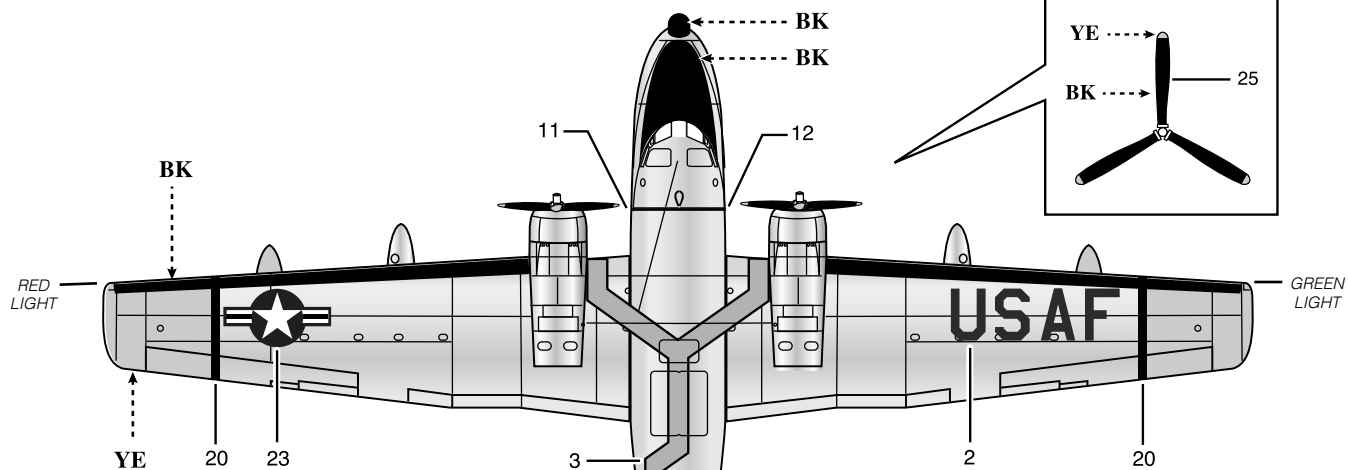


354th TFW

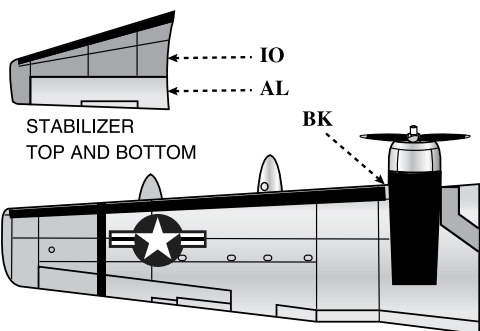

PAINT COLORS

AL		ALUMINUM PAINT FS 17178
WH		WHITE
YE		YELLOW FS 13538
BK		SEMI GLOSS BLACK
IO		INTERNATIONAL ORANGE FS 12197

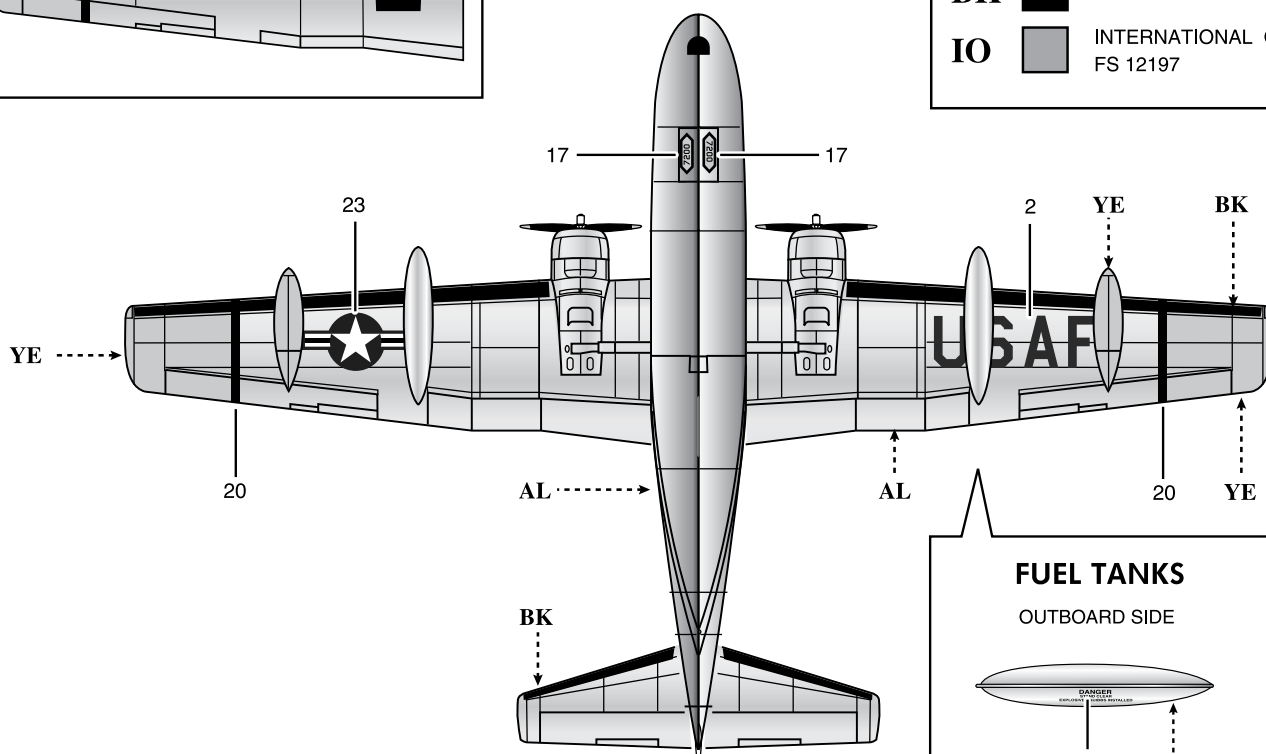

FUEL TANKS

OUTBOARD SIDE

